
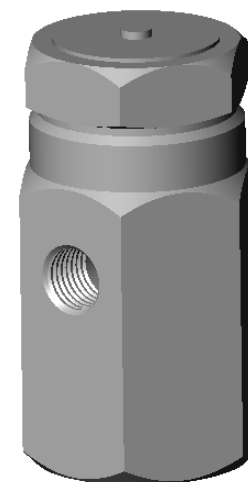
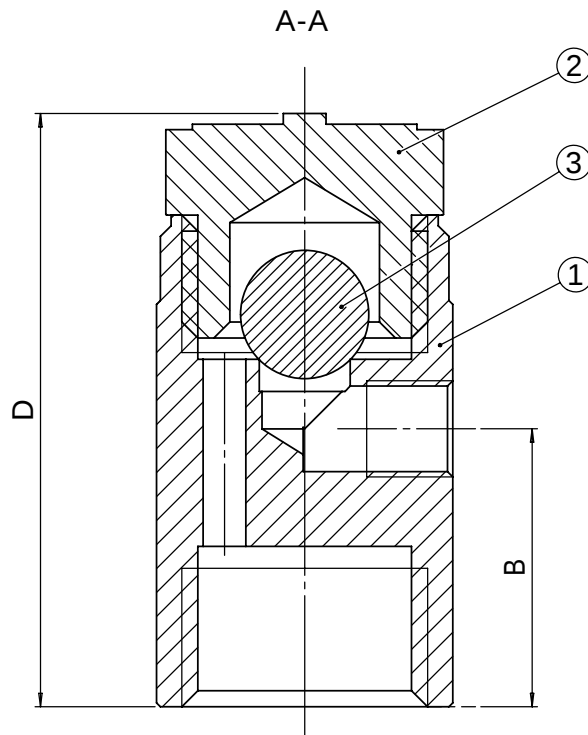


This document is the exclusive property of TECOFI. The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization are prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Photos and technical art works are not contractual. The specifications of the presented products are open to modifications without previous advice. They cannot be called, at any time, by the customer against TECOFI.

DN		A	B	C	D	Poids / Weight (kg)
mm	inch					
15	1/2"	32	26	26	52	0,17

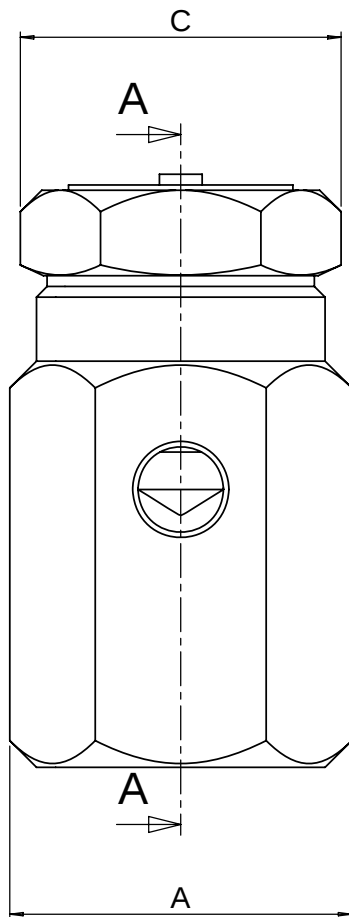

Taraudage gaz suivant la norme ISO 228-1.
BSP threaded according to standard ISO 228-1.

3	1	Bille / Ball valve		Inox / Stainless steel			
2	1	Chapeau / Bonnet		AISI 304			
1	1	Corps / Body		AISI 304			
Rep. Pos.	Nb. Qty.	Désignation Description		Matière Material		Remarque Remark	
MODIF.	In A	GD 22/11/05	Création initiale		B C	D E	
		5, Impasse Pascal Z.I. - BP 177 69686 CHASSIEU FRANCE		Dessiné par <i>Drawn by</i>	Vérifié par <i>Approved by</i>	Client <i>Customer</i>	Affaire <i>File Reference</i>
		Tel : +33 (0) 4 72 79 05 79 Fax : +33 (0) 4 78 99 19 19 E-mail : sales@tecofi.fr Web : www.tecofi.fr		Titre <i>Title</i> Casse vide Vacuum breaker DN 15	Echelle <i>Scale</i> No. Dessin <i>Drawing Nb</i> PCV 6150.doc		Date <i>Date</i> 22/11/2005

CONDITIONS DE SERVICE / PRESSURE TEMPERATURE RATING

PS max : 21 bar
T max : + 250 °C